

DEWALT

AUTO



POWER >>

ADVANTAGE

UK PRODUCT GUIDE



POWER

ADVANTAGE

PRODUCT GUIDE

Contents:

IMPACT WRENCHES

DCF961 02
 DCF900 10
 DCF891 18
 DCF921 26
 DCF923 34
 DCF901 42
 DCF903 48

UK RANGE COMPARISON

CORDLESS IMPACT WRENCHES 54

SEALED HEAD RATCHETS

DCF500 56
 DCF510 62

OPEN HEAD RATCHETS

DCF503/504 68
 DCF512/513 74

UK RANGE COMPARISON

CORDLESS RATCHETS 80

IMPACT DRIVER - DCF850 82

UNDER BONNET LIGHT - DCL045 86

RIVETERS

DCF414 90
 DCF403 96

BATTERY RANGE

GFN BATTERIES 102
 GFN POWERSTACK BATTERIES 105

PROTECTIVE BOOT RANGE 106



DEWALT

AUTO



THE
BEAST
UNLEASHED

2] **GUARANTEED TOUGH.®**

18V XR 1/2" HIGH TORQUE IMPACT WRENCH KIT



DCF961H2G-GB

CONTENTS:

- DCF961 18V XR 1/2" IMPACT WRENCH
- RUBBER BOOT
- 2 X DCBP518G 18V 5AH POWERSTACK BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT
- COLOUR CARTON

DEWALT

AUTO 

DCF961 18V XR 1/2" HIGH TORQUE IMPACT WRENCH



1/2" ANVIL

With hog ring & life durability improvement

ALLOWS QUICK SOCKET CHANGE



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING



SUPER BRIGHT LED

With brightness control

SAVES USER REQUIRING SEPARATE LIGHT



18V 5AH POWERSTACK BATTERY

Our most powerful, most efficient and longest lifespan battery in its class

DELIVERS THE HIGHEST PERFORMANCE IN DEMANDING APPLICATIONS




OPTIMISED IMPACT MECHANISM

Offers breakaway torque of up to **2372NM** and fastening torque of **1626NM**

THE MOST POWERFUL IMPACT WRENCH IN IT'S CLASS


BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT


TACTILE 4 MODE SELECT FEATURE

Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION


A SHOCK-ABSORBING BATTERY-TO-TOOL CONNECTION

Improved battery connection and wiring for increased efficiency

BATTERYGUARD™

DCF961

MOTOR	18V Brushless
BREAKAWAY TORQUE	2372NM
FASTENING TORQUE	1626NM
NO LOAD SPEED	0-1200 RPM
IMPACT RATE	0-1890 IPM
LENGTH	213MM
WEIGHT	3.47KG*

*Tool only


BOOST MODE

After 4 seconds of impacting the RPM is increased to deliver more power. This works in both directions but more useful in reverse for removing stubborn nuts/bolts if they haven't been removed within the first 4 seconds of impacting

DCF961 POWER MODES

INCREASE USER CONTROL IN A VARIETY OF APPLICATIONS

With 4-mode speed settings and variable speed trigger

Specifications		
MODE	APPLICATION	RPM
Mode 1	Normal Impacting	0-440 forward
		0-1200 reverse
Mode 2	Medium Impacting	0-800 forward
		0-1200 reverse
Mode 3	High Speed Impacting	0-1200 forward
		0-1200 reverse
Precision Wrench™ Mode	Precision Wrench™	0-1200 forward
		0-550 reverse



PRESS
to change
modes

PRESS
to change
LED
brightness



PRECISION WRENCH

Helps to prevent overtightening in forward and fastener run-off in reverse

Forward: Tool pauses before impacting to help prevent over-tightening. Up to **1496NM**

Reverse: Tool lowers speed when fastener is loose to help prevent run-off



MODE 2: MID SPEED

Tool operates at a reduced speed (approx. 1/2) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **1220NM**

Reverse: Tool operates at normal speed



MODE 1: LOW SPEED

Tool operates at a reduced speed (approx. 1/4) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **135NM**

Reverse: Tool operates at normal speed



MODE 3: HIGH SPEED

Tool operates at a normal speed in forward and reverse

Forward: Tool operates at normal speed. Up to **1626NM**

Reverse: Tool operates at normal speed









DCF961 UK SKU RANGE COMPARISON

DESCRIPTION: **18V XR HIGH TORQUE IMPACT WRENCH**

DRIVE SHANK: **1/2"**

Contents:



SKU	DCF961N-XJ	DCF961H2T-GB	DCF961H2G-GB
RUBBER BOOT	.	.	
BATTERY 1	.	 5 AH	 5 AH
BATTERY 2	.	 5 AH	 5 AH
CHARGER	.	4 AMP	4 AMP
FOAM INSERT	.	.	



DCF961

DEWALT

AUTO 



EXTREME TORQUE

10] **GUARANTEED TOUGH.®**

18V XR 1/2" HIGH TORQUE IMPACT WRENCH KIT



DCF900XPG-GB

CONTENTS:

- DCF900 18V XR 1/2" IMPACT WRENCH
- PB900.899 RUBBER BOOT
- 1 X DCB184G 18V 5AH GFN BATTERY
- 1 X DCB547G-XJ 18V 9AH GFN FLEXVOLT BATTERY
- 8 AMP CHARGER
- AUTO FOAM INSERT
- COLOUR CARTON

DEWALT**AUTO** **DCF900****18V XR 1/2" HIGH TORQUE IMPACT WRENCH****1/2" ANVIL**

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING**SUPER BRIGHT ADJUSTABLE LED**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT**18V 5AH GFN BATTERY**Longer runtime, more power
and rubber protective base**MAXIMISES PRODUCT PERFORMANCE**


OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **1898NM** and fastening torque of **1396NM**

ENABLES FASTER APPLICATIONS


BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT


ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT


TACTILE 4 MODE SELECT FEATURE WITH PRECISION WRENCH

Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION

DCF900

MOTOR	18V Brushless
BREAKAWAY TORQUE	1898NM
FASTENING TORQUE	1396NM
NO LOAD SPEED	0-2300 RPM
IMPACT RATE	0-2200 IPM
LENGTH	232mm
WEIGHT	2.9KG*

*Tool only



DCF900 POWER MODES

INCREASE USER CONTROL IN A VARIETY OF APPLICATIONS

With 4-mode speed settings and variable speed trigger

Specifications		
MODE	APPLICATION	RPM
Mode 1	Normal Impacting	0-650 forward 0-2300 reverse
Mode 2	Medium Impacting	0-1040 forward 0-2300 reverse
Mode 3	High Speed Impacting	0-2300 forward 0-2300 reverse
Precision Wrench™ Mode	Precision Wrench™	0-820 forward 0-2300 reverse



PRESS
to change
modes

PRESS
to change
LED
brightness



PRECISION WRENCH

Helps to prevent overtightening in forward and fastener run-off in reverse

Forward: Tool pauses before impacting to help prevent over-tightening. Up to **1396NM**

Reverse: Tool lowers speed when fastener is loose to help prevent run-off



MODE 2: MID SPEED

Tool operates at a reduced speed (approx. 1/2) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **813NM**

Reverse: Tool operates at normal speed



MODE 1: LOW SPEED

Tool operates at a reduced speed (approx. 1/4) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **135NM**

Reverse: Tool operates at normal speed



MODE 3: HIGH SPEED

Tool operates at a normal speed in forward and reverse

Forward: Tool operates at normal speed. Up to **1396NM**

Reverse: Tool operates at normal speed













DCF900 UK SKU RANGE COMPARISON

DESCRIPTION: 18V XR HIGH TORQUE IMPACT WRENCH

DRIVE SHANK: 1/2"

Contents:



SKU	DCF900N-XJ	DCF900P2T-GB	DCF900H2T-GB	DCF900XPG-GB
RUBBER BOOT	.	.	.	
BATTERY 1	.	 5 AH	 5 AH	 5 AH 
BATTERY 2	.	 5 AH	 5 AH	 54V XR VOLT 5.0 
CHARGER	.	4 AMP	4 AMP	8 AMP
FOAM INSERT	.	.	.	



DCF900

DEWALT

AUTO



COMPLETE CONTROL

18V XR 1/2" COMPACT IMPACT WRENCH KIT



DCF891P2G-GB

CONTENTS:

- DCF891 18V XR 1/2" COMPACT IMPACT WRENCH
- PB891.92 RUBBER BOOT
- 2 X DCB184G 18V 5AH GFN BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT
- COLOUR CARTON

DCF891 18V XR 1/2" COMPACT HIGH TORQUE IMPACT WRENCH**COMPACT DESIGN**

Short head length of **175mm**

GET TO HARD TO REACH AREAS

**1/2" ANVIL**

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE

**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING

**SUPER BRIGHT ADJUSTABLE LED**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT

**18V 5AH GFN BATTERY**

Longer runtime, more power and a rubber protective base

MAXIMISES PRODUCT PERFORMANCE





OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **1084NM** and fastening torque of **812NM**

ENABLES FASTER APPLICATIONS



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT



TACTILE 4 MODE SELECT FEATURE WITH PRECISION WRENCH


Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION

DCF891


MOTOR	18V Brushless
BREAKAWAY TORQUE	1084NM
FASTENING TORQUE	812NM
NO LOAD SPEED	0-2000 RPM
IMPACT RATE	0-3250 IPM
LENGTH	175mm
WEIGHT	1.7KG*

*Tool only

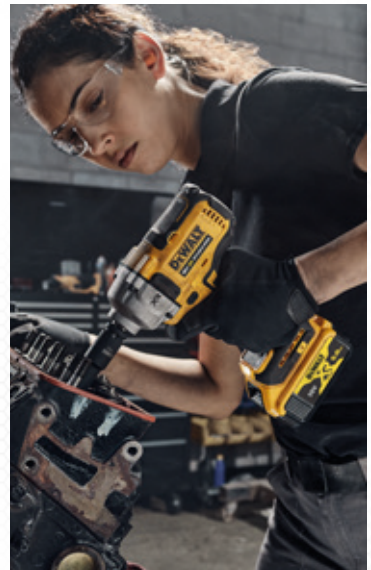

DCF891 POWER MODES**INCREASE USER CONTROL IN A VARIETY OF APPLICATIONS**

With 4-mode speed settings and variable speed trigger

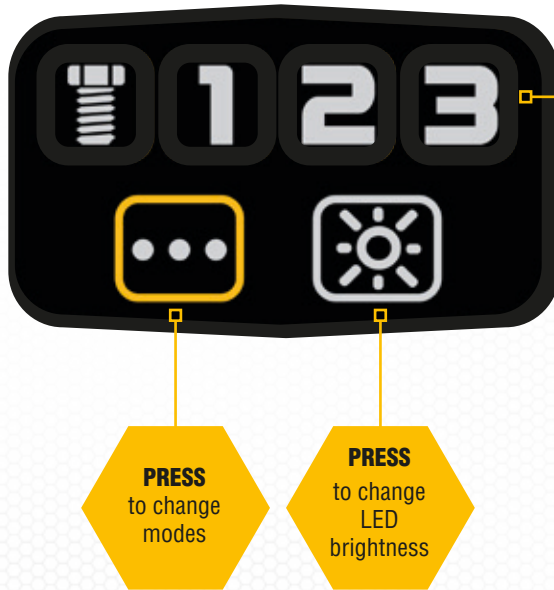



PRECISION WRENCH

Helps to prevent overtightening in forward and fastener run-off in reverse

Forward: Tool pauses before impacting to help prevent over-tightening

Reverse: Tool lowers speed when fastener is loose to help prevent run-off



MODE 1: LOW SPEED

Tool operates at a reduced speed (approx. 1/3) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **136NM**

Reverse: Tool operates at normal speed



MODE 2: MID SPEED

Tool operates at a reduced speed (approx. 1/2) in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed and outputs approximately **406NM**

Reverse: Tool operates at normal speed



MODE 3: HIGH SPEED

Tool operates at a normal speed in forward and reverse

Forward: Tool operates at normal speed.

Reverse: Tool operates at normal speed













DCF891 UK SKU RANGE COMPARISON

DESCRIPTION: **18V XR HIGH TORQUE COMPACT IMPACT WRENCH**
 DRIVE SHANK: **1/2"**

Contents:



SKU	DCF891N-XJ	DCF891P2T-GB	DCF891H2T-GB	DCF891P2G-GB
RUBBER BOOT	.	.	.	
BATTERY 1	.	 5 AH	 5 AH	 5 AH 
BATTERY 2	.	 5 AH	 5 AH	 5 AH 
CHARGER	.	4 AMP	4 AMP	4 AMP
FOAM INSERT	.	.	.	



DCF891

DEWALT

AUTO



COMPACT
BRUSHLESS

TECHNOLOGY

18V XR 1/2" COMPACT IMPACT WRENCH KIT



DCF921P2G-GB

CONTENTS:

- DCF921 18V XR 1/2" COMPACT IMPACT WRENCH
- PB921.22.23 RUBBER BOOT
- 2 X DCB184G 18V 5AH GFN BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT
- COLOUR CARTON

DCF921 18V XR 1/2" COMPACT IMPACT WRENCH**COMPACT DESIGN**

Short head length at **125mm**

GET TO HARD TO REACH AREAS

**1/2" ANVIL**

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE

**SUPER BRIGHT ADJUSTABLE LED HALO**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT

**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING

**18V 5AH GFN BATTERY**

Longer runtime, more power and a rubber protective base

MAXIMISES PRODUCT PERFORMANCE





OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **610NM** and fastening torque of **406NM**

ENABLES FASTER APPLICATIONS



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT



TACTILE 4 MODE SELECT FEATURE WITH PRECISION WRENCH

Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION

DCF921

MOTOR	18V Brushless
BREAKAWAY TORQUE	610NM
FASTENING TORQUE	406NM
NO LOAD SPEED	0-2500 RPM
IMPACT RATE	0-3550 IPM
LENGTH	125mm
WEIGHT	1.1KG*

*Tool only




DCF921 POWER MODES

INCREASE USER CONTROL IN A VARIETY OF APPLICATIONS

With 4-mode speed settings and variable speed trigger

Specifications		
MODE	APPLICATION	RPM
Precision Wrench™	Precision Wrench™	0-2500 forward
		0-2500 reverse
Scaffolding Mode	Scaffolding Mode	0-2500 forward
		0-2500 reverse
Speed 1	Low Speed Impacting	0-1400 forward
		0-2500 reverse
Speed 2	High Speed Impacting	0-2500 forward
		0-2500 reverse

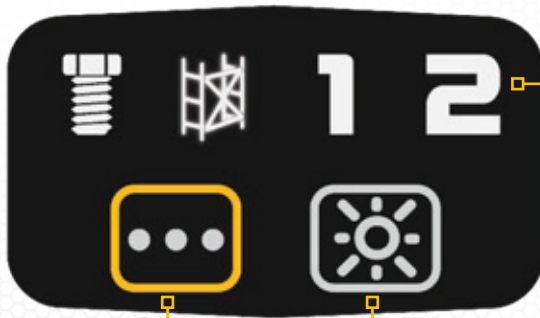

PRESS
to change
modes

PRESS
to change
LED
brightness



PRECISION WRENCH

Offers greater control in both fastening and loosening applications

Forward: Will fasten at **2500 RPM** until impact begins. The tool then pauses for 0.5 seconds before impacting at **3550 IPM**

Reverse: Will impact at **2500 RPM** and **3550 IPM**. The tool then lowers speed when the fastener is loose to help prevent run-off



SCAFFOLDING MODE

Scaffolding Mode: Helps to prevent overtightening in forward and fastener run-off in reverse

Forward: Tool runs down the fastener then impacts for a short period of time before cutting off to help prevent over tightening

Reverse: Impacts to break free before winding down then stops when the fastener is loose to help prevent run-off



MODE 1: LOW SPEED

Tool operates at a reduced speed in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed

Reverse: Tool operates at normal speed



MODE 2: HIGH SPEED

Tool operates at a normal speed in forward and reverse

Forward: Tool operates at normal speed

Reverse: Tool operates at normal speed



DCF921 UK SKU RANGE COMPARISON

DESCRIPTION: **18V XR COMPACT IMPACT WRENCH**

DRIVE SHANK: **1/2"**

Contents:



SKU	DCF921N-XJ	DCF921D2T-XJ	DCF921P2T-GB	DCF921H2T-GB	DCF921P2G-GB
RUBBER BOOT	
BATTERY 1	.	 2 AH	 5 AH	 5 AH	 5 AH 
BATTERY 2	.	 2 AH	 5 AH	 5 AH	 5 AH 
CHARGER	.	4 AMP	4 AMP	4 AMP	4 AMP
FOAM INSERT	



DCF921

DEWALT

AUTO



COMPACT POWER

18V XR 3/8" COMPACT IMPACT WRENCH KIT



DCF923P2G-GB

CONTENTS:

- DCF923 18V XR 3/8" COMPACT IMPACT WRENCH
- PB921.22.23 RUBBER BOOT
- 2 X DCB184G 18V 5AH GFN BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT
- COLOUR CARTON

DCF923 18V XR 3/8" COMPACT IMPACT WRENCH**COMPACT DESIGN**

Short head length at **125mm**

GET TO HARD TO REACH AREAS

**3/8" ANVIL**

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE

**SUPER BRIGHT ADJUSTABLE LED HALO**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT

**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING

**18V 5AH GFN BATTERY**

Longer runtime, more power and a rubber protective base

MAXIMISES PRODUCT PERFORMANCE





OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **610NM** and fastening torque of **406NM**

ENABLES FASTER APPLICATIONS



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT



TACTILE 4 MODE SELECT FEATURE WITH PRECISION WRENCH

Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION

DCF923

MOTOR	18V Brushless
BREAKAWAY TORQUE	610NM
FASTENING TORQUE	406NM
NO LOAD SPEED	0-2500 RPM
IMPACT RATE	0-3550 IPM
LENGTH	125mm
WEIGHT	1.1KG*

*Tool only




DCF923 POWER MODES

INCREASE USER CONTROL IN A VARIETY OF APPLICATIONS

With 4-mode speed settings and variable speed trigger

Specifications		
MODE	APPLICATION	RPM
Precision Wrench™	Precision Wrench™	0-2500 forward
		0-2500 reverse
Timber Screw™	Timber Screw™	0-2500 forward
		0-2500 reverse
Speed 1	Low Speed Impacting	0-1400 forward
		0-2500 reverse
Speed 2	High Speed Impacting	0-2500 forward
		0-2500 reverse

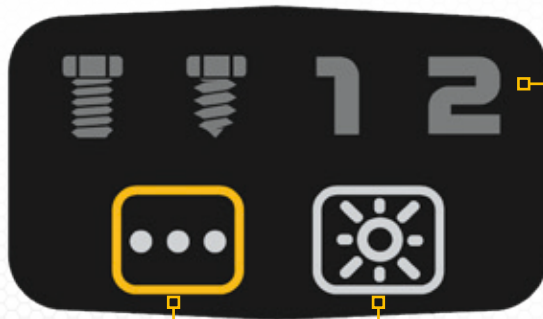

PRESS
to change
modes

PRESS
to change
LED
brightness



PRECISION WRENCH

Offers greater control in both fastening and loosening applications

Forward: Will fasten at **2500 RPM** until impact begins. The tool then pauses for 0.5 seconds before impacting at **3550 IPM**

Reverse: Will impact at **2500 RPM** and **3550 IPM**. The tool then lowers speed when the fastener is loose to help prevent run-off



TIMBER SCREW MODE

Timber Screw Mode: Optimises tool performance to help increase the speed of fastening applications in softer materials



MODE 1: LOW SPEED

Tool operates at a reduced speed in forward to help prevent overtightening of small fasteners

Forward: Tool operates at a reduced speed

Reverse: Tool operates at normal speed



MODE 2: HIGH SPEED

Tool operates at a normal speed in forward and reverse

Forward: Tool operates at normal speed







Reverse: Tool operates at normal speed



DCF923 UK SKU RANGE COMPARISONDESCRIPTION: **18V XR COMPACT IMPACT WRENCH**DRIVE SHANK: **3/8"**

Contents:



SKU	DCF923N-XJ	DCF923P2G-GB
RUBBER BOOT	.	
BATTERY 1	.	 5 AH 
BATTERY 2	.	 5 AH 
CHARGER	.	4 AMP
FOAM INSERT	.	



DCF923

DEWALT

AUTO 



OPTIMISED IMPACT
MECHANISM

12V XR 1/2" IMPACT WRENCH KIT



DCF901P1G-GB

CONTENTS:

- DCF901 12V XR 1/2" IMPACT WRENCH
- PB901.03 RUBBER BOOT
- 1 X DCB126G 12V 5AH GFN BATTERY
- 4 AMP CHARGER
- AUTO FOAM INSERT

DCF901 12V XR 1/2" COMPACT IMPACT WRENCH**1/2" ANVIL**

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE

**SUPER BRIGHT LED HALO**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT

**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING

**12V 5AH GFN BATTERY**

Longer runtime, more power and a rubber protective base

MAXIMISES PRODUCT PERFORMANCE




COMPACT DESIGN

Short head length at **132mm**

GET TO HARD TO REACH AREAS


OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **542NM** and fastening torque of **340NM**

ENABLES FASTER APPLICATIONS


BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT


ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT

DCF901

MOTOR	12V Brushless
BREAKAWAY TORQUE	542NM
FASTENING TORQUE	340NM
NO LOAD SPEED	0-2850 RPM
IMPACT RATE	0-3250 IPM
LENGTH	132mm
WEIGHT	1KG*

*Tool only












DCF901 UK SKU RANGE COMPARISON

DESCRIPTION: **12V XR IMPACT WRENCH**

DRIVE SHANK: **1/2"**

Contents:



SKU	DCF901P1-GB	DCF901P1G-GB
RUBBER BOOT	.	
BATTERY 1	 	  
BATTERY 2	.	.
CHARGER		
FOAM INSERT	.	



DCF901

DEWALT

AUTO



QUICK SOCKET CHANGES

12V XR 3/8" IMPACT WRENCH KIT



DCF903P1G-GB

CONTENTS:

- DCF903 12V XR 3/8" IMPACT WRENCH
- PB901.03 RUBBER BOOT
- 1 X DCB126G 12V 5AH GFN BATTERY
- 4 AMP CHARGER
- AUTO FOAM INSERT

DEWALT

AUTO 

DCF903 12V XR 3/8" COMPACT IMPACT WRENCH



3/8" ANVIL

With Hog Ring for ease of use

ALLOWS QUICK SOCKET CHANGE



SUPER BRIGHT LED HALO

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING



12V 5AH GFN BATTERY

Longer runtime, more power and a rubber protective base

MAXIMISES PRODUCT PERFORMANCE





COMPACT DESIGN

Short head length at **132mm**

GET TO HARD TO REACH AREAS



OPTIMISED IMPACT MECHANISM

Offers increased breakaway torque of up to **542NM** and fastening torque of **340NM**

ENABLES FASTER APPLICATIONS



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT

DCF903

MOTOR	12V Brushless
BREAKAWAY TORQUE	542NM
FASTENING TORQUE	340NM
NO LOAD SPEED	0-2850 RPM
IMPACT RATE	0-3250 IPM
LENGTH	132mm
WEIGHT	1KG*

*Tool only












DCF903 UK SKU RANGE COMPARISON

DESCRIPTION: **12V XR IMPACT WRENCH**

DRIVE SHANK: **3/8"**

Contents:



SKU	DCF903P1-GB	DCF903P1G-GB
RUBBER BOOT	.	
BATTERY 1	 	  
BATTERY 2	.	.
CHARGER		
FOAM INSERT	.	



DCF903

UK RANGE COMPARISON CORDLESS IMPACT WRENCHES

**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



SKU	DCF901	DCF902	DCF903	DCF921*/2
Description	Impact Wrench	Impact Wrench (Sub Compact)	Impact Wrench	Compact Impact Wrench
Voltage/ Motor				
Drive Shank	1/2"	3/8"	3/8"	1/2"
Fastening Torque (NM)	340	168	340	406
Breakaway Torque (NM)	542	271	542	610
Impact Rate (IPM)	0-3250	0-3600	0-3250	0-3550
No Load Speed (RPM)	0-2850	0-2850	0-2850	0-2500
Socket Retention	Hog Ring	Hog Ring	Hog Ring	Hog Ring*/Detent Pin
Mode Select	1	3	1	4
Lights	LED HALO	LED HALO	LED HALO	LED HALO
Weight (KG)	1	0.8	1	1.1
Length (mm)	132	130	130	125

**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



DCF923	DCF891*/2	DCF897	DCF900	DCF961
Compact Impact Wrench	Compact High Torque Impact Wrench	High Torque Impact Wrench	High Torque Impact Wrench	High Torque Impact Wrench
3/8"	1/2"	3/4"	1/2"	1/2"
406	812	950	1396	1626
610	1084	1625	1898	2372
0-3550	0-3250	0-2400	0-2200	0-1890
0-2500	0-2000	0-1900	0-2300	0-1200
Hog Ring	Hog Ring*/Detent Pin	Hog Ring	Hog Ring	Hog Ring
4	4	3	4	4
LED HALO	SUPER BRIGHT LED FOOT	LED FOOT	SUPER BRIGHT LED FOOT	SUPER BRIGHT LED FOOT
1.1	1.7	2.6	2.9	3.47
125	175	224	232	213

DEWALT

AUTO



INTERCHANGEABLE ANVILS

VEHICLE EMISSION
CONTROL INFORMATION

Fuel: Gasoline /

Year: 2017

Continent: U.S.

U.S. EPA: 2017

California: 2017

Group: 1

Exempt: No

DG1100

Lot / Tier2: LDT / ULEV125

Lot / ULEV125

5.3L

150A / 31-35 gal tank: 150A21250B

12V XR SEALED HEAD CORDLESS 1/4-3/8" RATCHET KIT**DCF500L2G-GB**

CONTENTS:

- DCF500 12V XR 1/4-3/8" RATCHET
- 2 X DCB124G-XJ 12V 3AH GFN BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT

DEWALT

AUTO



DCF500 12V XR SEALED HEAD CORDLESS 1/4-3/8" RATCHET



INTERCHANGEABLE ANVILS

1/4" & 3/8" Square Drive and
1/4" Hex Drive included

VERSATILITY



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



DURABLE SEALED HEAD

Double pawl designed
for strength

**ACCESS HARD TO
REACH SPACES**



WORK SPACE LED

Improved visibility

**INCREASED ACCURACY
AND PRODUCTIVITY**



TRIGGER LOCK

Prevents inadvertent
switching on

INCREASED SAFETY



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING




ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT


12V 3AH GFN BATTERY

Compatible with the growing range of 50+ class leading 12V cordless power tools. Combining performance and class leading ergonomics

MAXIMISES PRODUCT PERFORMANCE/ ERGONOMICS

DCF500

MOTOR	12V Brushless
FASTENING TORQUE	67NM
RPM	0-450 RPM
LENGTH	330mm
WEIGHT	0.9KG*

*Tool only










DCF500 UK RANGE COMPARISON

DESCRIPTION: 12V XR SEALED HEAD RATCHET
 DRIVE SHANK: 1/4-3/8"



Contents:



SKU	DCF500N-XJ	DCF500L2G-GB
BATTERY 1	.	  
BATTERY 2	.	  
CHARGER	.	4 AMP
FOAM INSERT	.	



DCF500



DEWALT

AUTO



FASTER APPLICATION
SPEED AND INCREASED
PRODUCTIVITY

18V XR SEALED HEAD CORDLESS 3/8-1/2" RATCHET KIT



DCF510E2G-GB

CONTENTS:

- DCF510 18V XR 3/8-1/2" RATCHET
- 2 X DCBP034G-XJ 18V COMPACT POWERSTACK BATTERIES
- 4 AMP CHARGER
- AUTO FOAM INSERT

DEWALT

AUTO



DCF510

18V XR SEALED HEAD CORDLESS 3/8-1/2" RATCHET



INTERCHANGEABLE ANVILS

3/8" & 1/2" Square Drive included

VERSATILITY



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



DURABLE SEALED HEAD

Double pawl designed for strength

ACCESS HARD TO REACH SPACES



WORK SPACE LED

Improved visibility

INCREASED ACCURACY AND PRODUCTIVITY



TRIGGER LOCK

Prevents inadvertent switching on

INCREASED SAFETY



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING


ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT


18V COMPACT POWERSTACK GFN BATTERY

LONG RUNTIME & LIGHTWEIGHT TO MAXIMISE PRODUCT PERFORMANCE

DCF510

MOTOR	18V Brushless
FASTENING TORQUE	101NM
RPM	0-300 RPM
LENGTH	381mm
WEIGHT	1.2KG*

*Tool only








DCF510 UK RANGE COMPARISON

DESCRIPTION: **18V XR SEALED HEAD RATCHET**
 DRIVE SHANK: **3/8-1/2"**



Contents:



SKU	DCF510N-XJ	DCF510E2G-GB
BATTERY 1	.	 
BATTERY 2	.	 
CHARGER	.	4 AMP
FOAM INSERT	.	



DCF510



DEWALT

AUTO



ACCESS ALL AREAS



12V XR OPEN HEAD RATCHET KITS



DCF503L1G-GB

DCF504L1G-GB

CONTENTS:

- 12V XR RATCHET
- 1 X DCB124G 12V 3AH GFN BATTERY
- 2 AMP CHARGER
- AUTO FOAM INSERT

DEWALT

AUTO



DCF503 & DCF504 12V XR OPEN HEAD RATCHETS



FORWARD/REVERSE SELECTOR

Positioned conveniently at top of head like a manual ratchet

EASE OF USE



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



WORK SPACE LED

Improved visibility

INCREASED ACCURACY AND PRODUCTIVITY



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING



TRIGGER LOCK

Prevents inadvertent switching on

INCREASED SAFETY




ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT


12V 3AH GFN BATTERY

Compatible with the growing range of 50+ class leading 12V cordless power tools. Combining performance and class leading ergonomics

MAXIMISES PRODUCT PERFORMANCE/ ERGONOMICS



	DCF503	DCF503EN	DCF504
MOTOR	12V Brushless	12V Brushless	12V Brushless
DRIVE	3/8"	3/8"	1/4"
FASTENING TORQUE	81NM	81NM	54 NM
NO LOAD SPEED	0-250 RPM	0-250 RPM	0-250 RPM
LENGTH	330mm	430mm	305mm
WEIGHT	1KG*	1.2KG*	0.8KG*

*Tool only

DCF503EN

100mm extended neck








DCF503 UK RANGE COMPARISON

DESCRIPTION: 12V XR OPEN HEAD RATCHET
 DRIVE SHANK: 3/8"



Contents:











SKU	DCF503N-XJ	DCF503EN-XJ	DCF503D1-GB	DCF503L1G-GB
BATTERY 1	.	.		
BATTERY 2
CHARGER	.	.		
FOAM INSERT	.	.	.	

DCF504 UK RANGE COMPARISON

DESCRIPTION: 12V XR OPEN HEAD RATCHET
 DRIVE SHANK: 1/4"



Contents:

SKU	DCF504N-XJ	DCF504D1-XJ	DCF504L1G-GB
BATTERY 1	.	 	  
BATTERY 2	.	.	.
CHARGER	.		
FOAM INSERT	.	.	

DEWALT

AUTO



TURN HEADS

18V XR OPEN HEAD RATCHET KITS



DCF512D1G-GB

DCF513D1G-GB

CONTENTS:

- 18V XR RATCHET
- 1 X DCB183G 18V 2AH GFN BATTERY
- 2 AMP CHARGER
- AUTO FOAM INSERT

DEWALT

AUTO



DCF513 & DCF512 18V XR OPEN HEAD RATCHETS



FORWARD/REVERSE SELECTOR

Positioned conveniently at top of head like a manual ratchet

EASE OF USE



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



WORK SPACE LED

Improved visibility

INCREASED ACCURACY AND PRODUCTIVITY



VARIABLE SPEED TRIGGER

Allows speed control

LOWER RISK OF OVER TIGHTENING



TRIGGER LOCK

Prevents inadvertent switching on

INCREASED SAFETY




ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT



18V 2AH GFN BATTERY

Compatible with the growing range of 250+ class leading 18V cordless power tools. Combining performance and class leading ergonomics

MAXIMISES PRODUCT PERFORMANCE/ ERGONOMICS

	DCF513	DCF512
MOTOR	18V Brushless	18V Brushless
DRIVE	3/8"	1/2"
FASTENING TORQUE	95NM	95NM
NO LOAD SPEED	250 RPM	250 RPM
LENGTH	360mm	360mm
WEIGHT	1.1KG*	1.1KG*

*Tool only

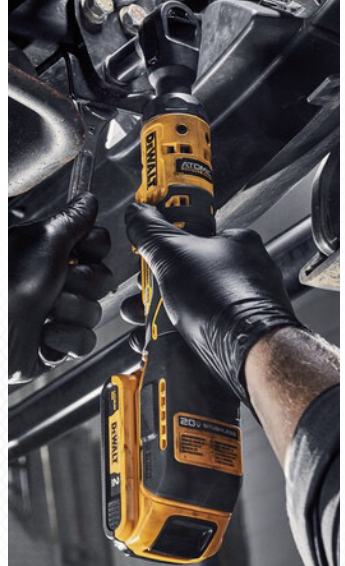









DCF512 UK RANGE COMPARISON

DESCRIPTION: **18V XR OPEN HEAD RATCHET**
 DRIVE SHANK: **1/2"**



Contents:



SKU	DCF512N-XJ	DCF512D1-GB	DCF512D1G-GB
BATTERY 1	.	 	  
BATTERY 2	.	.	.
CHARGER	.		
FOAM INSERT	.	.	

DCF513 UK RANGE COMPARISON

DESCRIPTION: 18V XR OPEN HEAD RATCHET
 DRIVE SHANK: 3/8"



Contents:



SKU	DCF513N-XJ	DCF513D1G-GB
BATTERY 1	.	
BATTERY 2	.	.
CHARGER	.	
FOAM INSERT	.	

UK RANGE COMPARISON CORDLESS RATCHETS

MAC
TOOLS
RANGE










MAC
TOOLS
RANGE



MAC
TOOLS
RANGE



SKU	DCF510	DCF512	DCF513
 Voltage (V)			
 Description	18V Brushless Sealed Head Ratchet	18V Brushless Ratchet	18V Brushless Ratchet
 Drive	3/8-1/2" Square	1/2"	3/8"
 Length(mm)	381	360	360
 Max Torque (NM)	101	95	95
 No Load Speed (RPM)	0-300	0-250	0-250
 Weight (KG)	1.2	1.1	1.1

**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



**MAC
TOOLS
RANGE**



DCF500

DCF503

DCF504

DCF503EN



12V Brushless
Sealed Head
Ratchet

12V Brushless
Ratchet

12V Brushless
Ratchet

12V Brushless
Extended Head
Ratchet

1/4-3/8" Square
1/4" Hex

3/8"

1/4"

3/8"

330

330

305

430

67

81

54

81

0-450

0-250

0-250

0-250

0.9

1

0.8

1.2

DEWALT

AUTO 

PREMIUM IMPACT

18V XR ULTRA COMPACT IMPACT DRIVER KIT



DCF850D1G-XJ

CONTENTS:

- DCF850 18V XR IMPACT DRIVER
- PB850 RUBBER BOOT
- 1 X DCB183G 18V 2AH GFN BATTERY
- AUTO FOAM INSERT

DCF850 18V XR ULTRA COMPACT IMPACT DRIVER**SUPER COMPACT DESIGN**

Class leading head length at **100mm**

GET TO HARD TO REACH AREAS

**IMPROVED 1/4" BIT HOLDER**

More durable design with less bit run out

OFFERS IMPROVED USER EXPERIENCE

**SUPER BRIGHT LED HALO**

Offers workpiece lighting

SAVES USER REQUIRING SEPARATE LIGHT

**VARIABLE SPEED TRIGGER**

Allows speed control

LOWER RISK OF OVER TIGHTENING

**18V 2AH GFN BATTERY**

GFN housing is resistant to common garage chemicals and grease

MAXIMISES PRODUCT PERFORMANCE





OPTIMISED IMPACT MECHANISM

Offers fastening torque of **205NM** in tiny package

ENABLES FASTER APPLICATIONS



BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT



ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT



3 MODE SELECT SWITCH

Allows the user to select different modes and speed control

GIVES THE USER THE OPTION TO SELECT THE CORRECT MODE FOR THE APPLICATION

DCF850

MOTOR	18V Brushless
FASTENING TORQUE	206NM
NO LOAD SPEED	0-3250 RPM
IMPACT RATE	0-3800 IPM
LENGTH	100mm
WEIGHT	0.95KG*

*Tool only



DEWALT

AUTO 



ILLUMINATE YOUR
WORKSPACE

18V/12V XR UNDER-BONNET LIGHT



DCL045-XJ

- UNDER-BONNET LIGHT PROVIDING ILLUMINATION FOR AUTOMOTIVE REPAIR
- COLLAPSES DOWN TO A COMPACT SIZE
- SUPPLIED AS A BARE UNIT

DEWALT

AUTO 

DCL045 18V/12V XR UNDERBONNET LIGHT

18V XR

12V XR



INDEPENDENT LIGHT ARMS

Maximise runtime and minimise downtime

INDIVIDUALLY CONTROLLABLE



18V
12V

18V & 12V COMPATIBLE

More value from system

CAN USE EXISTING BATTERIES



FOLDING DESIGN

Reduces storage space and increases portability

COLLAPSES DOWN TO COMPACT SIZE



SPRING-LOADED & ROTATING HOOKS

Better illumination in all situations

**FITS A WIDE RANGE OF VEHICLES
(1.3M-1.9M WIDTH)**



DCL045	
POWER	18V/12V
BRIGHTNESS	800-1700 LM
SETTINGS	2
MOUNTING WIDTH	1.3M-1.9M
IND CONTROLLABLE ARMS	YES
WEIGHT	2.5KG*

*Tool only

DEWALT

AUTO



**FAST
& EASY
RIVETING
PERFORMANCE**

18V XR 1/4" (4.8-6.4MM) RIVETER KIT



DCF414E2GT-GB

CONTENTS:

- DCF414 18V XR 1/4" RIVETER
- 2 X DCBP034G-XJ 18V COMPACT POWERSTACK BATTERIES
- 2 AMP CHARGER
- TSTAK II CASE

DEWALT

AUTO 

DCF414 18V XR 1/4" (4.8-6.4MM) RIVETER



**TOOL FREE NOSE
TIP CHANGE**

With on-board nose storage
**INCREASES COMFORT AND
SAVES TIME**



20KN MAX FORCE

With 30mm stroke length
**INCREASED POWER FOR
VARIOUS TYPES OF BLIND
RIVETS UP TO 6.4MM**



SUPER BRIGHT LED

To illuminate work area
**SAVES USER REQUIRING
SEPARATE LIGHT**




BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT


HIGHLY EFFICIENT AND DURABLE PULLING MECHANISM

Constant high lifetime performance

COMPLETE THE APPLICATION IN ONE GO


ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT

DCF414

MOTOR	18V Brushless
MAX FORCE	20KN
MAX STROKE	30MM
LENGTH	268MM
WEIGHT	1.6KG*

*Tool only











DCF414 UK SKU RANGE COMPARISON

DESCRIPTION: **18V XR RIVETER KIT**

RIVET CAPACITY: **4.8 – 6.4MM**

Contents:



SKU	DCF414NT-XJ	DCF414E2T-GB	DCF414E2GT-GB
RUBBER BOOT	.	.	.
BATTERY 1	.		
BATTERY 2	.		
CHARGER	.		
TSTAK II	.		



DCF414

DEWALT

AUTO 

**CLASS
LEADING**

ERGONOMICS

18V XR 3/16" (2.4-4.8MM) RIVETER KIT



DCF403E1GT-GB

CONTENTS:

- DCF403 18V XR 3/16" RIVETER
- 1 X DCBP034G-XJ 18V COMPACT POWERSTACK BATTERY
- 2 AMP CHARGER
- TSTAK II CASE

DEWALT

AUTO 

DCF403 18V XR 3/16" (2.4-4.8MM) RIVETER



**TOOL FREE NOSE
TIP CHANGE**

With on-board nose storage
**INCREASES COMFORT AND
SAVES TIME**



10KN MAX FORCE

With 25mm stroke length
**INCREASED POWER FOR
VARIOUS TYPES OF BLIND
RIVETS UP TO 4.8MM**



SUPER BRIGHT LED

To illuminate work area
**SAVES USER REQUIRING
SEPARATE LIGHT**




BRUSHLESS MOTOR

More power, efficiency and durability

MORE EFFECTIVE AND RELIABLE PRODUCT


HIGHLY EFFICIENT AND DURABLE PULLING MECHANISM

Constant high lifetime performance

COMPLETE THE APPLICATION IN ONE GO


ERGONOMIC GRIP DESIGN

More comfortable grip allowing for longer duration of use

MAXIMISES USER COMFORT

DCF403

MOTOR	18V Brushless
MAX FORCE	10KN
MAX STROKE	25MM
LENGTH	268MM
WEIGHT	1.6KG*

*Tool only







DCF403 UK SKU RANGE COMPARISON

DESCRIPTION: **18V XR RIVETER KIT**

RIVET CAPACITY: **2.4-4.8MM**

Contents:



SKU	DCF403NT-XJ	DCF403E1T-GB	DCF403E1GT-GB
RUBBER BOOT	.	.	.
BATTERY 1	.		
BATTERY 2	.	.	.
CHARGER	.		
TSTAK II	.	✓	✓



DCF403

DEWALT

AUTO



**MAXIMUM
RUNTIME**

DEWALT
AUTO
BATTERY RANGE

- Compatible with existing DEWALT skus
- Glass-Filled Nylon (GFN) housing resistant to common garage chemicals and grease
- No-marr overmould
- TPE (Thermoplastic Elastomer) overmould protects workpiece and provides stability
- With State of Charge (SOC) indicator

DCB183G-XJ
**18V XR 2AH
GFN BATTERY**

DCB184G-XJ
**18V XR 5AH
GFN BATTERY**

DCB124G-XJ
**12V XR 3AH
GFN BATTERY**

DCB126G-XJ
**12V XR 5AH
GFN BATTERY**


DEWALT

AUTO



XR FLEXVOLT

RUNTIME AND POWER

DCB547G-XJ

**18V XR 9AH
GFN FLEXVOLT BATTERY**

54V XR FLEXVOLT 18V 9AH



GFN BATTERY RANGE FEATURES

STATE OF CHARGE (SOC) Indicator



GLASS-FILLED NYLON

(GFN) Housing resistant to damage from long-chain polymers common in garage chemicals and grease

NON-MAR OVERMOULD

TPE overmould protects workpiece and provides stability

DURABLE CONSTRUCTION

meets rigorous drop test requirements

POWERSTACK 5AH

**THE
NEXT DIMENSION
IN POWER™**

**OUR MOST POWERFUL,
MOST EFFICIENT AND
LONGEST LIFESPAN BATTERY
IN IT'S CLASS**



- 18V XR System Compatibility
- Pouch Cell Construction for improved power & longevity



DCBP034G-XJ

**18V COMPACT
POWERSTACK GFN BATTERY**



DCBP518G-XJ

**18V 5AH
POWERSTACK GFN BATTERY**



DEWALT

AUTO 



**PROTECT YOUR
TOOL**

DEWALT

AUTO 

PROTECTIVE BOOT RANGE

PB901.03

DCF901
DCF903



PB921.22.33

DCF921
DCF922
DCF923



PB891.92

DCF891
DCF892



PB900.899

DCF900
DCF899



PB850

DCF850



POWER >>
ADVANTAGE
UK PRODUCT GUIDE



Part of the World's Largest Tool Company

StanleyBlack&Decker